

尺寸: 195\*134mm

# Manual Instruction


## 2.4GHz RF 4-Zone Remote Control

Model Number: RC03RF/RC03RFB

### 1.Features


This product adopt world-wide used 2.4GHz frequency, GFSK control method, with the features of low power consumption, long distance transmitting, strong anti-interference and fast communication rate. It can control our 2.4GHz RF smart lights and controllers with color changing, color Temperature adjust, saturation and brightness changing.

### 2.Product Size

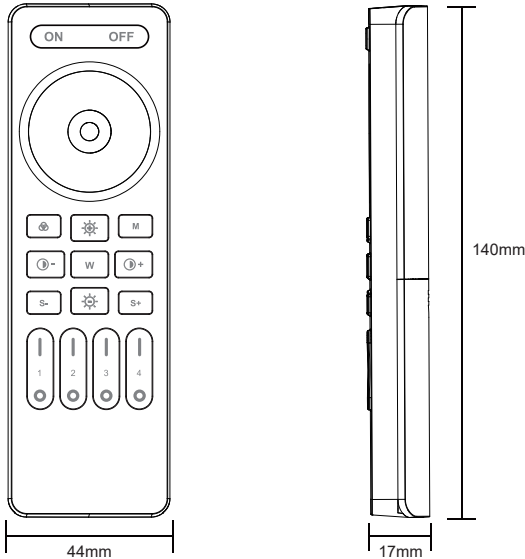

### 3. Button Instruction

RC03RF/RC03RFB: 4-Zone RGB&RGBW&RGB CCT Remote Control

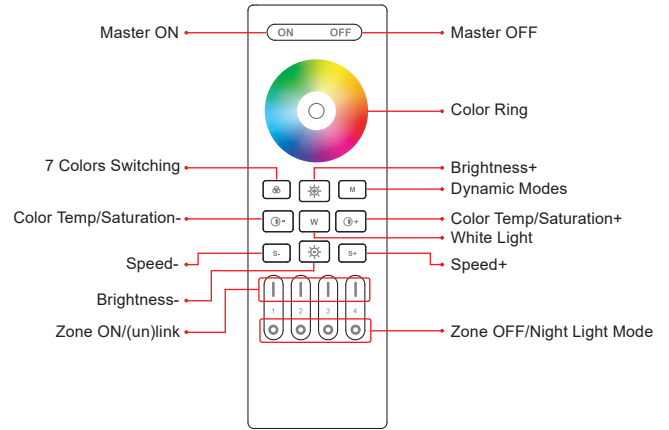

- Press the button to turn ON all linked devices
- Press the button to turn OFF all linked devices
- Touch the color ring to change the colors.
- Press the button to get the white light
- Short press the button to switch the pure colors from orange, yellow, green, cyan, blue, purple and red repeatedly. Long press the button to switch the pure colors from orange, yellow, green, cyan, blue, purple and red gradually.
- Under white light mode, press the button to change the white light to cold white. Under color light mode, press the button to reduce the saturation.
- Under white light mode, press the button to change the white light to warm white. Under color light mode, press the button to add the saturation.
- Press the button to switch the dynamic modes repeatedly
- Press the button to dim the brightness down.
- Press the button to dim the brightness up.
- Lower the dynamic mode speed.
- Accelerate the dynamic mode speed.

### 4.Linking and Unlinking Instruction

Remark: The light can be working after linking with the remote.

#### Linking Code instructions

**1**

Switch off light, after 10 seconds then switch on again.

**2**

Short press " | " button 3 times within 3 seconds when light on.

**3**

Lights blink 3 times slowly means linking is done successfully.

Linking failed if light is not blinking slowly, Please follow above steps again. (Note: Light that have linked can't link again)

#### Unlinking Code Instructions

**1**

Switch off light, after 10 seconds then switch on again.

**2**

Short press " | " button 5 times within 3 seconds when light on.

**3**


Lights blink 10 times quickly means unlinking is done successfully.

Unlinking failed if light is not blinking quickly, Please follow above steps again. (Note: Light haven't linked that don't need to unlink)

### 5.Group Control

You can add an endless numbers of lights to a zone on the 4 channel remote by linking the lights to different zones. This way you are completely flexible in creating different group combinations.

Below you can see some grouping examples

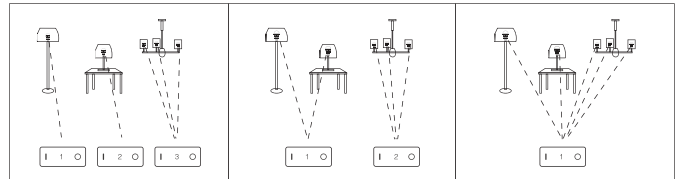

Remark:

1. The user can re-programme freely as needed. One remote can control countless lamps or controllers, but one lamp or controller can only be controlled by five remotes (Max).
2. Please check the battery installation and controller (totally discharge the power), when you programme after switching off and switching on.

### 6. Attention

1. This remote only control our 2.4GHz RF products; cannot control other products not made by us.
2. In the using of the remote, if the indicated lamp blinking quickly, Please change the battery in time. Please don't use poor quality battery to avoid the leaking of battery liquid to damage the remote.
3. This 2.4GHz remote is precise electronic product; don't use it in humid, high temperature, dust and high voltage environment; Saving it at indoor, dry and no static electricity environment.
4. Please don't use the remote on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.



Made in China